

a measurable difference...




Coefficient Of Friction Tester

Model: C0008

This extremely easy to use instrument has been manufactured to determine the static and kinetic friction of plastic film, sheeting, paper and other sheeted material.

The coefficient of friction (COF) is a number which represents the friction between two surfaces. Friction is a force relating to molecular structure of two surfaces touching each other. Molecules from one surface link with molecules from the other. If you press the objects together more tightly, you push the surfaces closer together, joining more molecules. This is why friction is proportional to the normal force, how tightly the surfaces have to push on each other to keep from breaking. This proportion is the coefficient of friction.

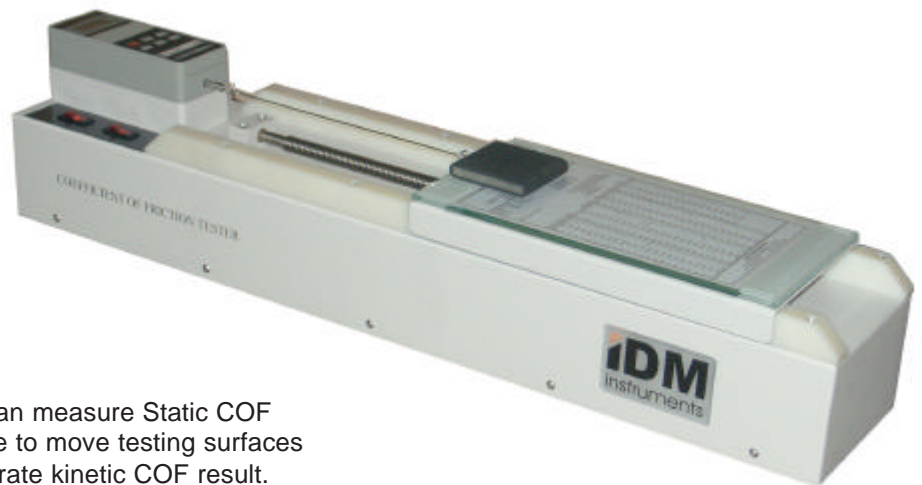

The Coefficient of Friction Tester can measure Static COF from a resting position and continue to move testing surfaces in a relative motion to give an accurate kinetic COF result.

The Coefficient of Friction Tester employs a stationary sled with a moving plane. With the option of a computer software package to record data, the IDM COF Tester has proven itself to be a fast, reliable and accurate method of determining friction in various areas of manufacturing.

Applications:

- Flexible packaging, foils
- Paper
- Rubber
- Plastics
- Linoleum
- Metal
- Printing
- Coatings
- Composites

10-11 Colrado Court, Hallam, Victoria 3803 Australia.

Phone: +61 3 9708 6885 Fax: +61 3 9708 6770

Website: www.idminstruments.com.au Email: ids@idminstruments.com.au

All sizes and dimensions shown on this data sheet are averages only and images are as accurate as the medium allows. Products and details shown may change without notice as IDM Instruments Pty Ltd[®] reserves the right to make alterations to its product range from time to time.

Copyright © 2006 IDM Instruments Pty Ltd[®]. All Rights Reserved.

a measurable difference...



Coefficient Of Friction Tester

Features:

- Push-button and auto zero
- RS-232, Analog, Mitutoyo Printer output
- Read-out in selectable units kg, lb, N (1 x 0.001kgF)
- Speed:- 150 +/- 15mm/min
- Sled Weight: 200 +/- 5g at 63.5mm x 63.5mm
- Plane: 150 x 300 x 6mm
- Multi-directional levelling device

Software Features:

- Dynamic real-time display
 - Statistical analysis
 - Basic ease of use
 - Average results
 - Screen print out
 - Data saving in Excel
 - Test identification entry
 - Peak force value
 - Static Point
 - Kinetic average
 - Adjustable data collection limits
- * Note: Computer not included



Standards:

- ASTM D 1894
- TAPPI 549
- Optional - ISO 8295

Options:

- DPS Printer with Statistical Analysis
- Variable Speeds
- Software and Real-time curve
- Chart Recorder
- Cutting Templates x 2

Connections:

- **Electrical:** 220/240 VAC @ 50 HZ or
110 VAC @ 60 HZ
(please specify when ordering)

Dimensions:

- **H:** 170mm • **W:** 160mm • **D:** 760mm
- **Weight:** 10kg

10-11 Colrado Court, Hallam, Victoria 3803 Australia.

Phone: +61 3 9708 6885 Fax: +61 3 9708 6770

Website: www.idminstruments.com.au Email: ids@idminstruments.com.au

All sizes and dimensions shown on this data sheet are averages only and images are as accurate as the medium allows. Products and details shown may change without notice as IDM Instruments Pty Ltd[®] reserves the right to make alterations to its product range from time to time.

Copyright © 2006 IDM Instruments Pty Ltd[®]. All Rights Reserved.